


ROUIN


RVNet-NAT-S

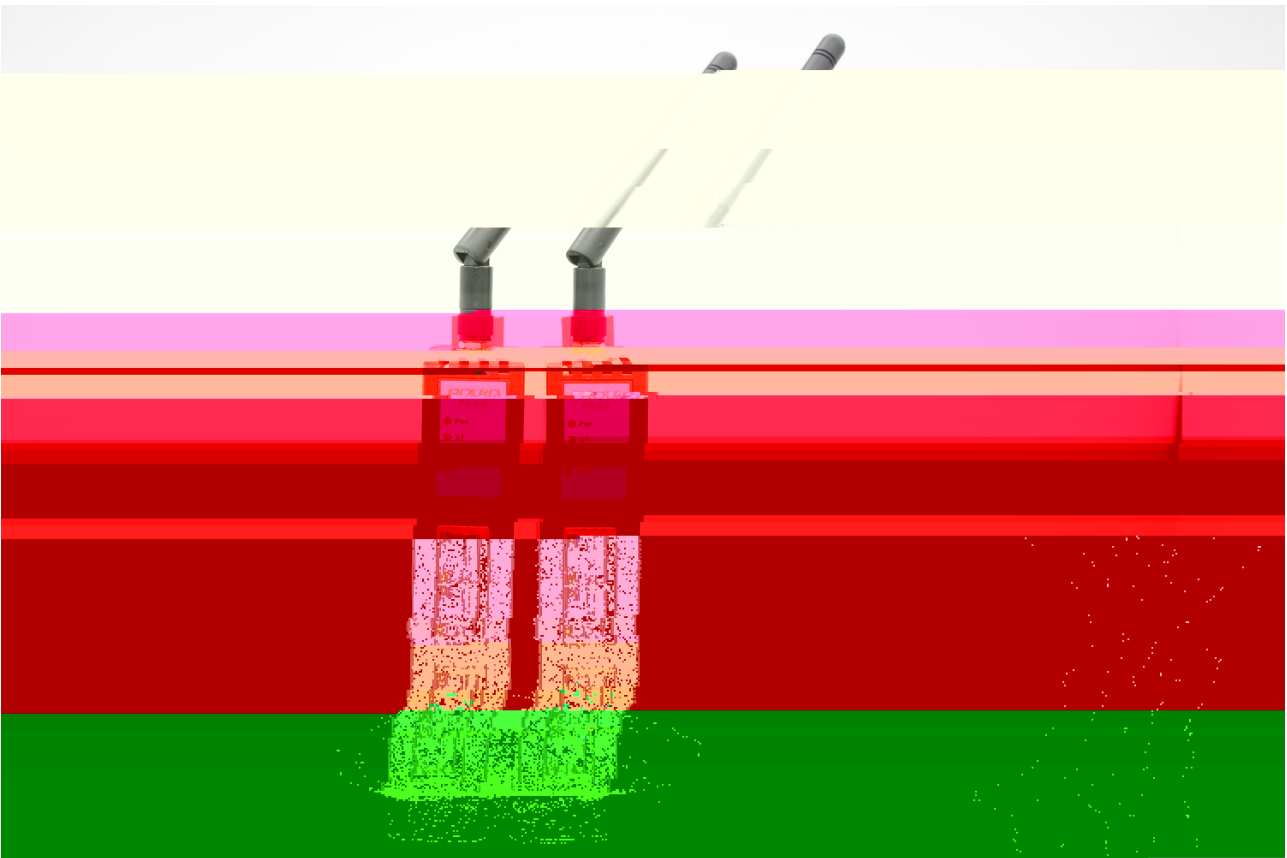

1.1

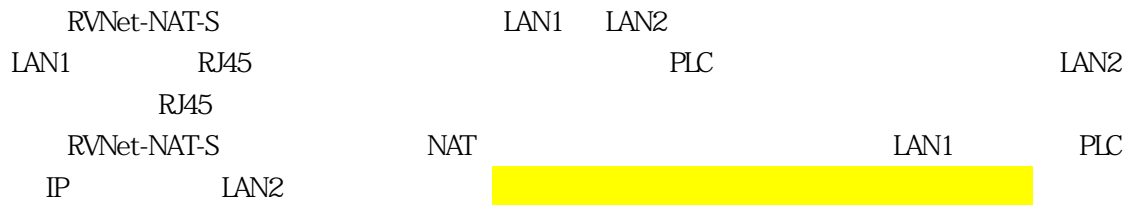

1.3

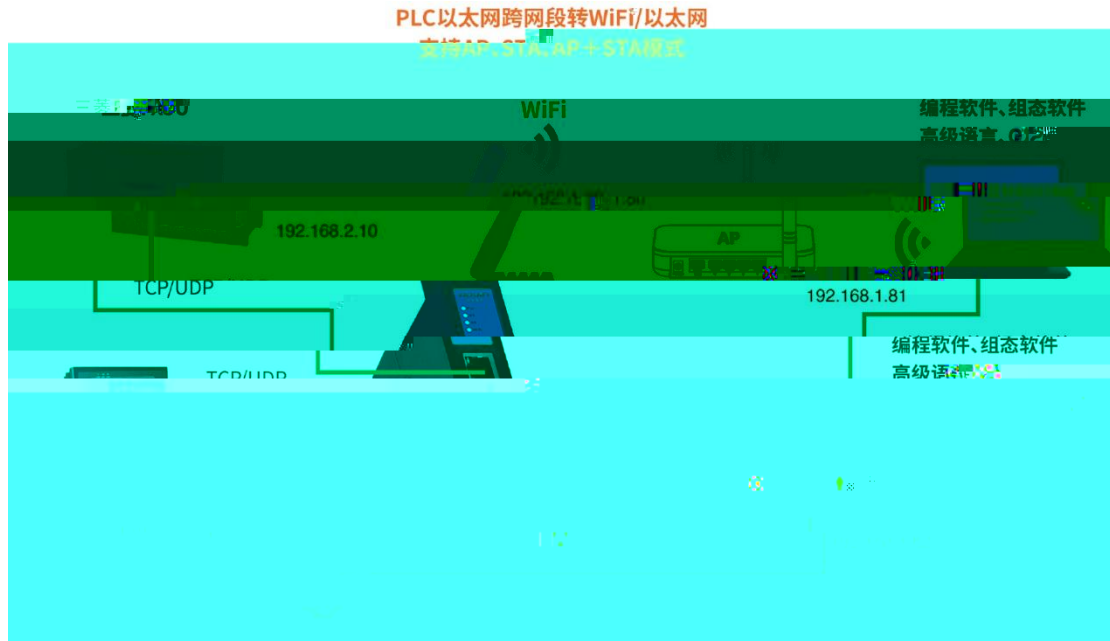


NAT



3.1



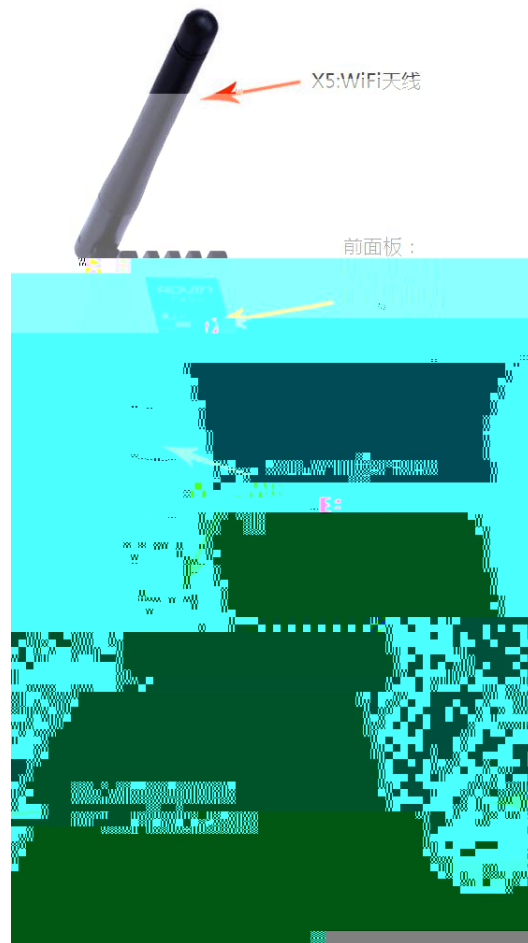

3.1.1 LAN1

X1

RJ45*4

- 1 ——— TX+
- 2 ——— TX-
- 3 ——— RX+
- 6 ——— RX-

Link Active 10/100M
T568A/ T568B

3.1.2 LAN2


X2

RJ45


- 1 ——— TX+
- 2 ——— TX-

4.1 Web

1. IP 192.168.1.100

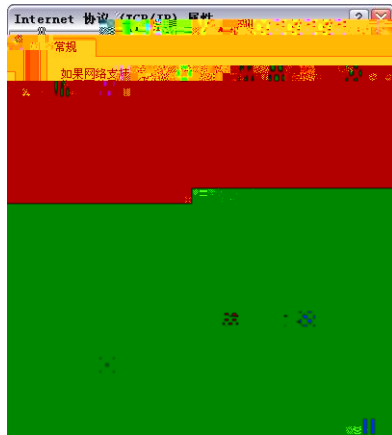


2. IP 192.168.1.188 RVNet-NAT-S Web
Internet Explorer RVNet-NAT-S

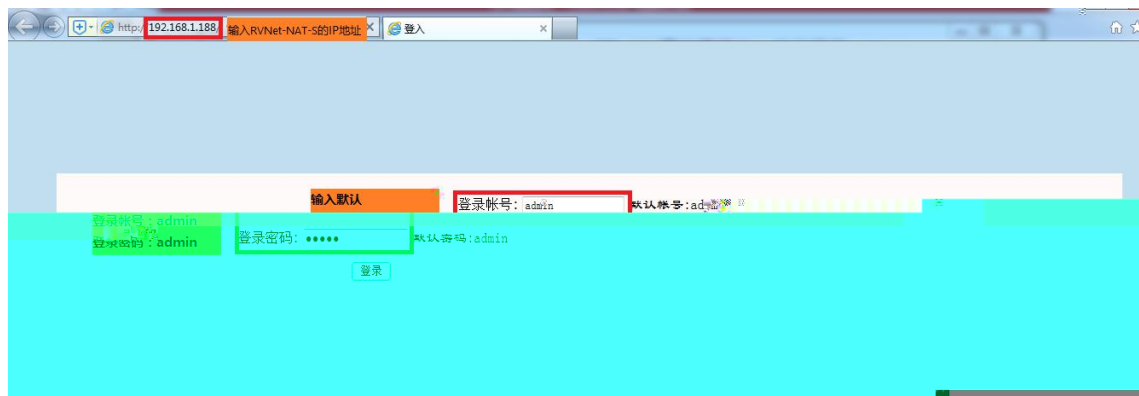

- 3.



网络接口参数和状态:

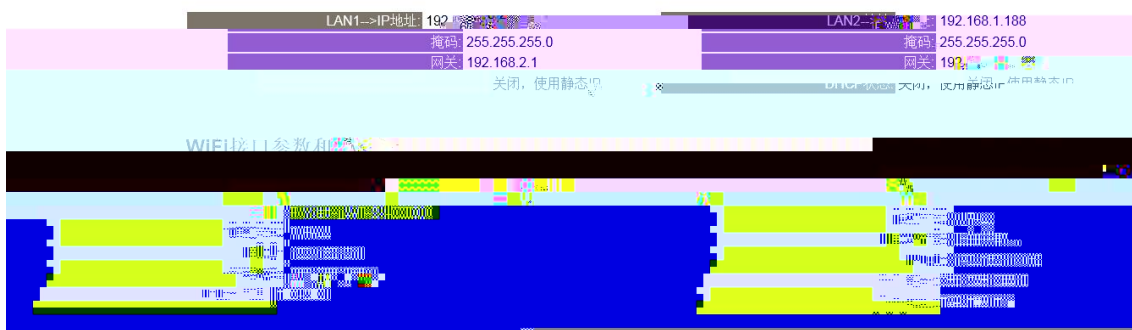

PLC

LAN1


LAN2


LAN2

4.1.1 LAN1



RVNet-NAT-S i

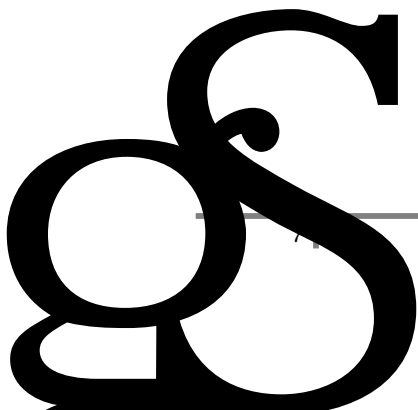

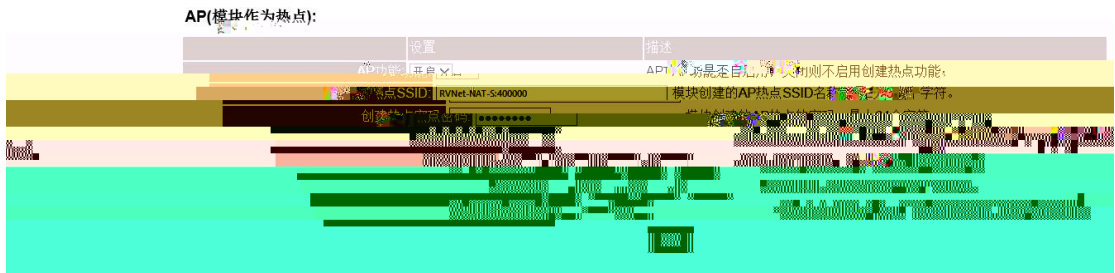

WiFi

Station	Station	SSID	AP	SSID	32	AP	64	AP	WEP	WPA	WPA2
		IP		IP							

IP	Station	IP	192.168.1.168
	Station		255.255.255.0
	Station		192.168.1.1

WiFi

AP	AP	SSID	AP	SSID	32	AP	64

AP

WEP WPA WPA2

AP IP AP IP 192.168.3.1

AP 255.255.255.0

AP AP IP

[] RVNet-NAT-S

IP

4.1.4

通讯诊断

LAN1接口通讯

LAN1接口参数

- 通讯请求总数: 0
- 正确响应次数: 0
- 错误响应次数: 0
- TCP/UDP存在数: 0

LAN2/WiFi接口通讯

LAN2/WiFi接口参数

- 通讯请求总数: 0
- 正确响应次数: 0
- 错误响应次数: 0
- TCP/UDP存在数: 0

WiFi状态

- AP(模块做热点) —> 状态: 创建热点成功
- 客户端数: 0
- Standard(模块连接热点) —> 状态: 初始化中
- 信号强度: -0dBm
- DHCP状态: 正在获取...

系统信息

- 运行时间: 0天 00:22
- 上次内部故障: 无故障




LAN2



TCP/UDP

LAN2

4

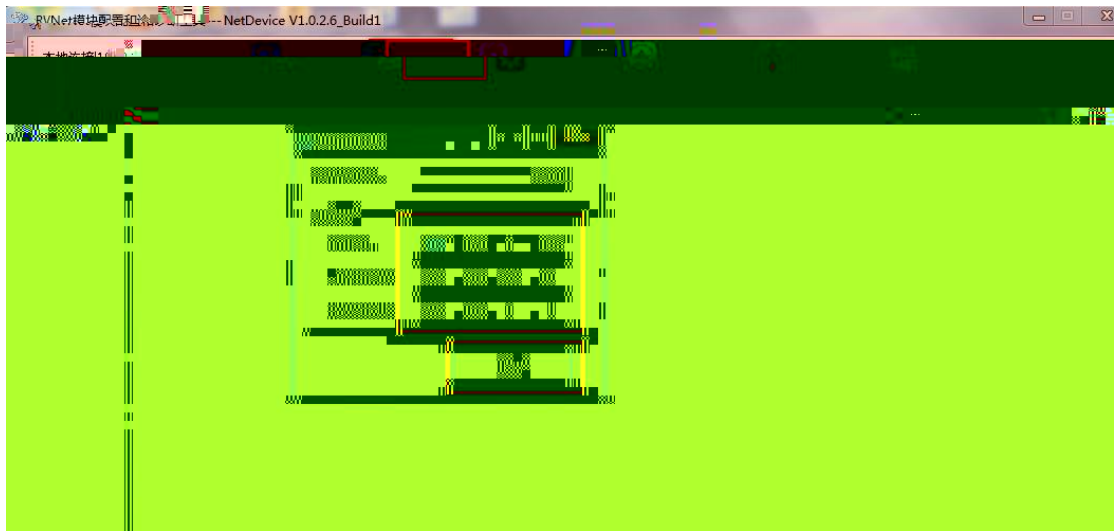

4.2.3


1.



IP				RVNet-NAT-S	LAN2	IP
LAN2	IP	PLC	IP			IP
DHCP					LAN2	IP
LAN2	1	LAN2		TCP	UDP	PLC
		TCP	102			
LAN2	2	LAN2		TCP	UDP	PLC
		UDP	1002			


3 WiFi

1 >> AP

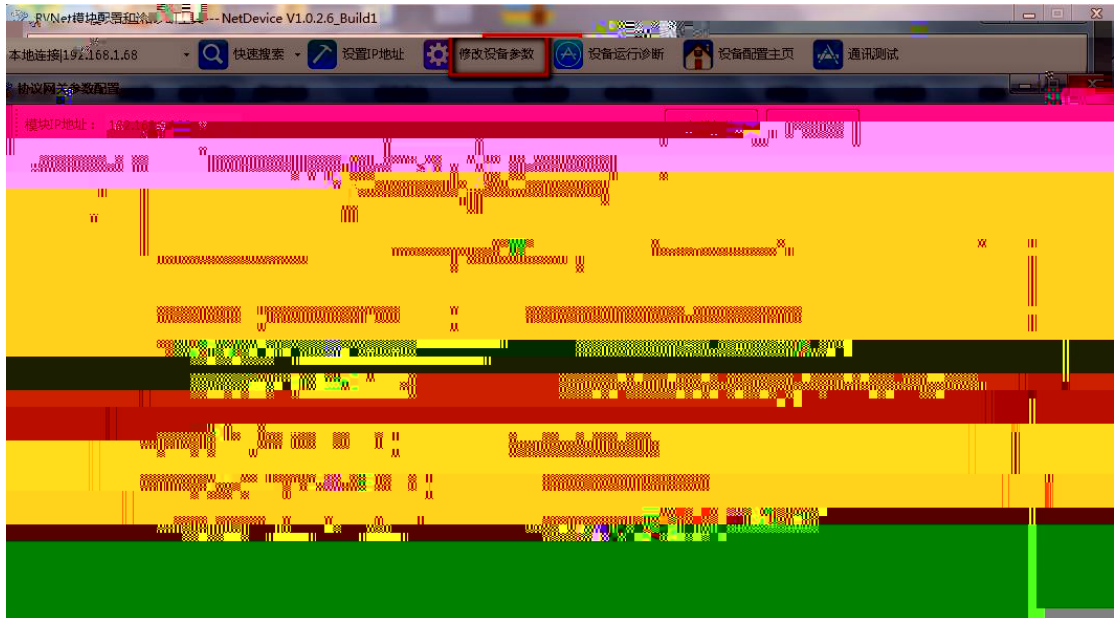


AP	AP		
	AP	SSID	32
	AP		64

			AP			WEP	WPA	WPA2
WPA2	AP	IP		AP	IP			
AP			AP					
AP			AP		IP			
2		Station						

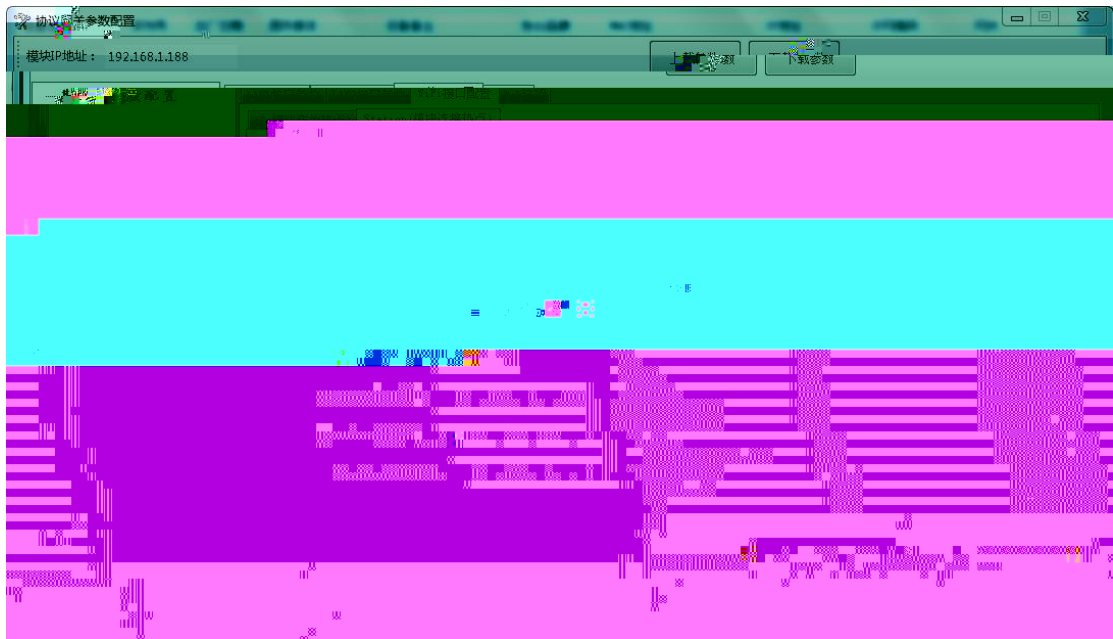


3. “ ” “ ” “ ”

Station	IP	“	IP
”	Station	DHCP	IP
	IP	“	IP
	IP	”	

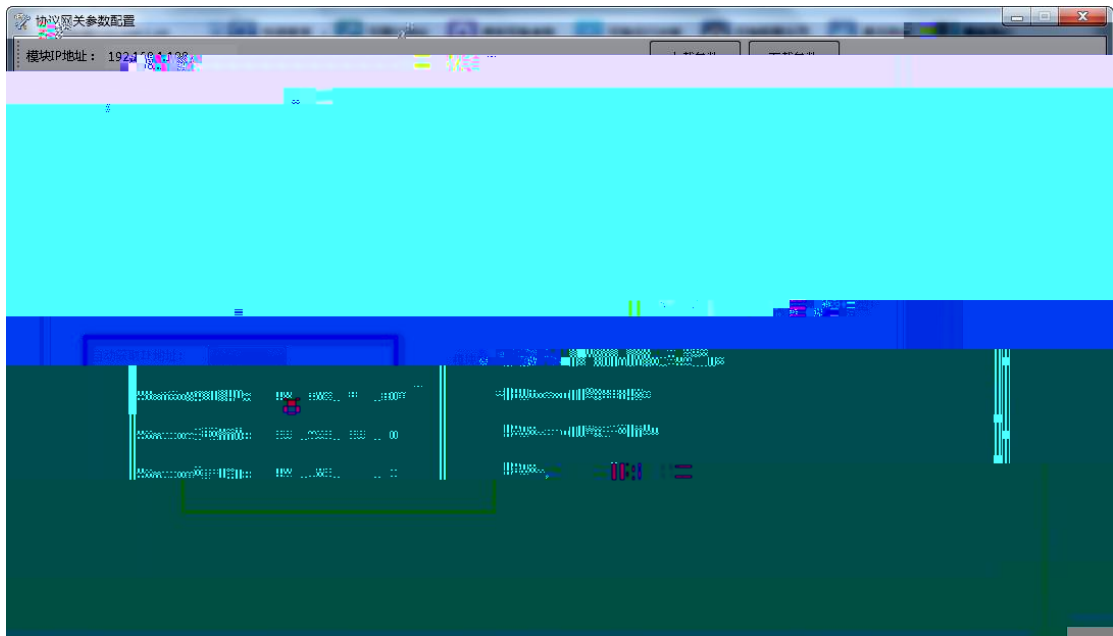

4. “ ”

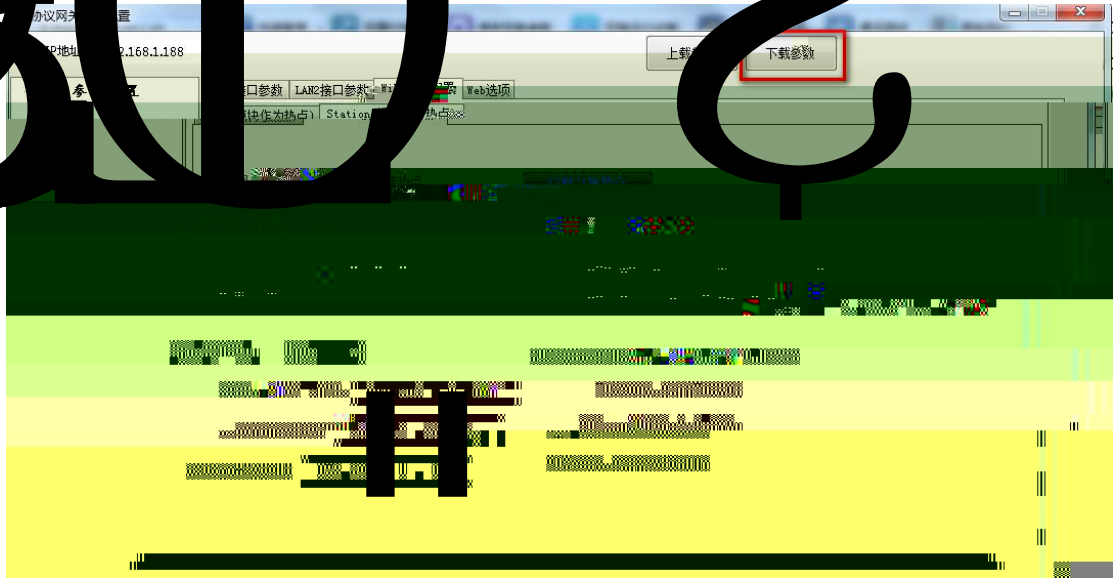

TT T


1.

" T

½

"

" .
Æ

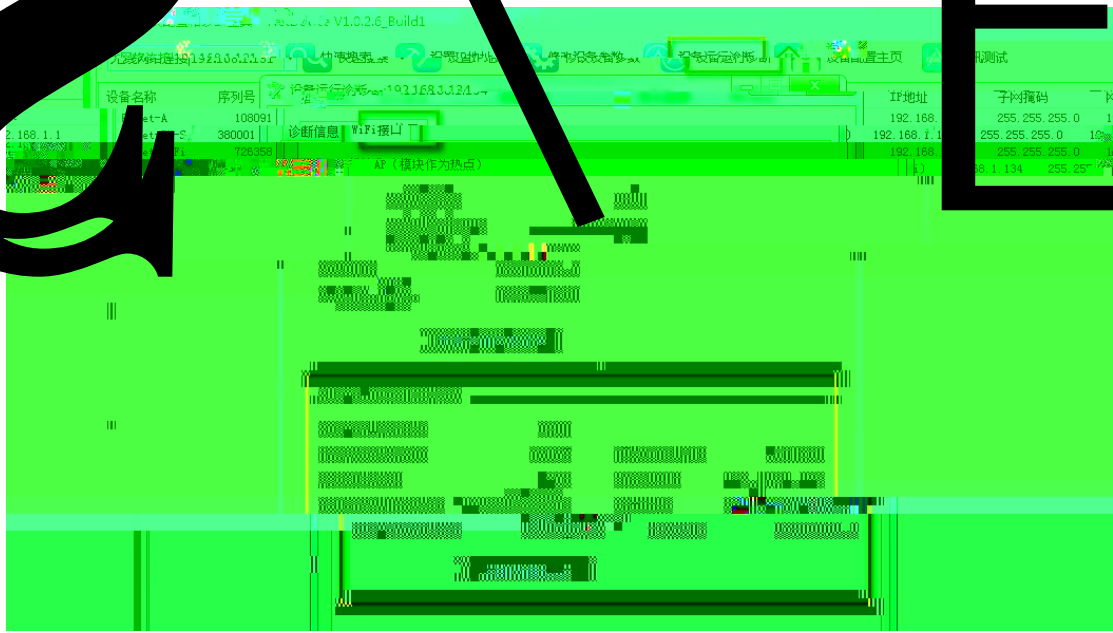


NetDevice “ ”


“WiFi ”>>“Station()” Station “ ”




2. “AP()” “ AP ”

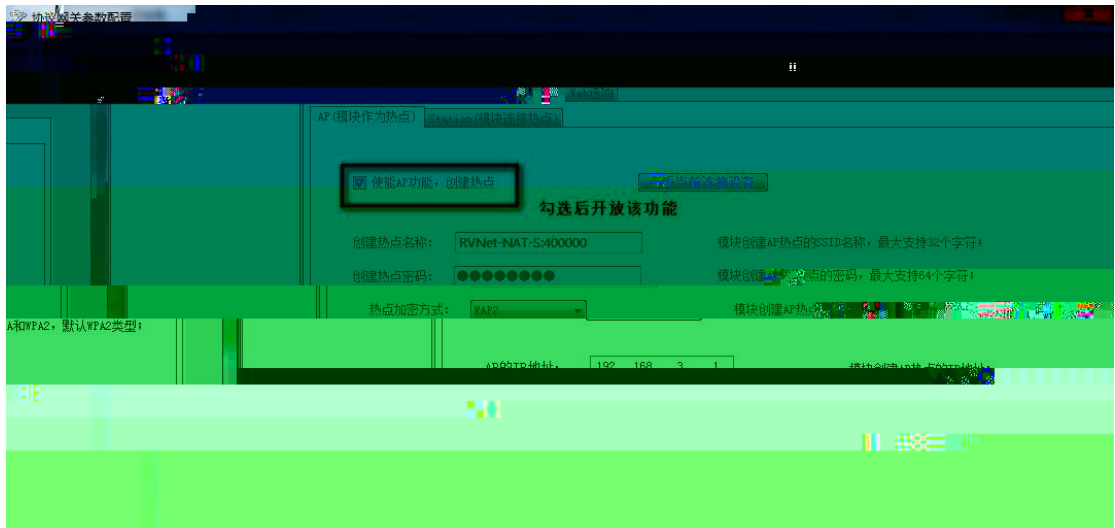

3. AP

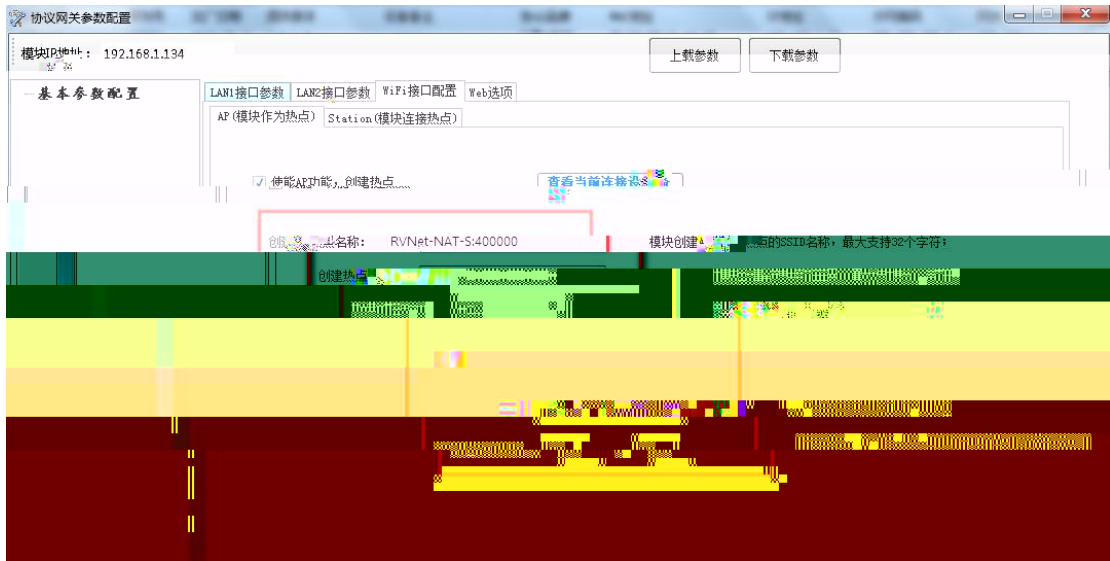

- A “ ” “RVNet-NAT-S:XXXXXX” “XXXXXX”
- B “ ” “12345678”
- 8
- C “ ” WEP WPA WPA2
WAP2
- D “AP IP ” AP IP 192.168.3.1
255.255.255.0 AP IP C
- E “AP ” DHCP 100—200
5. “ ”

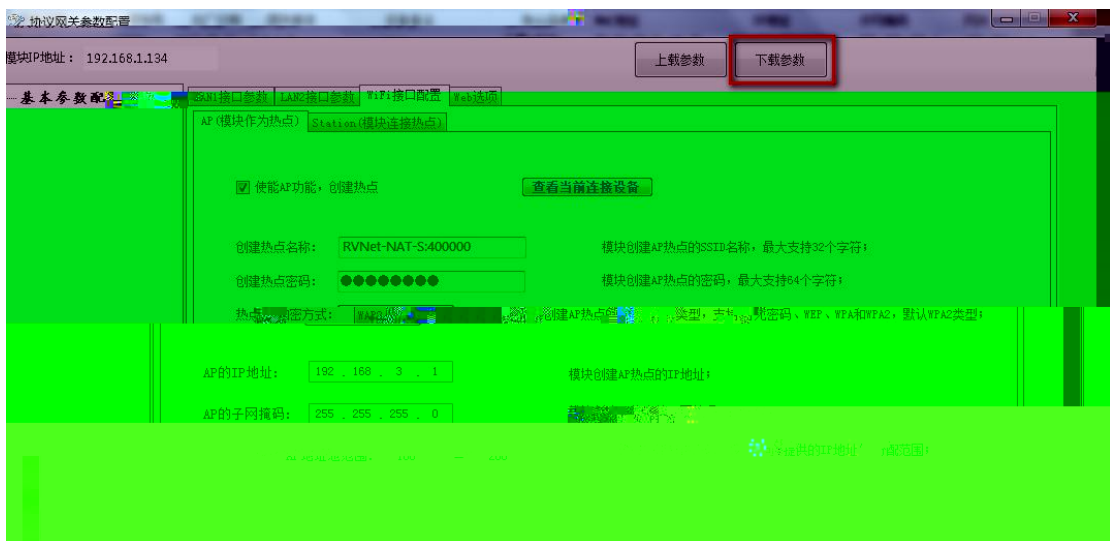

1. “RVNet-NAT-S:XXXXXX”




© !

2. “RVNet-NAT-S:XXXXXX” RVNet

192.168.3.100 IP

IP

192.168.3.1

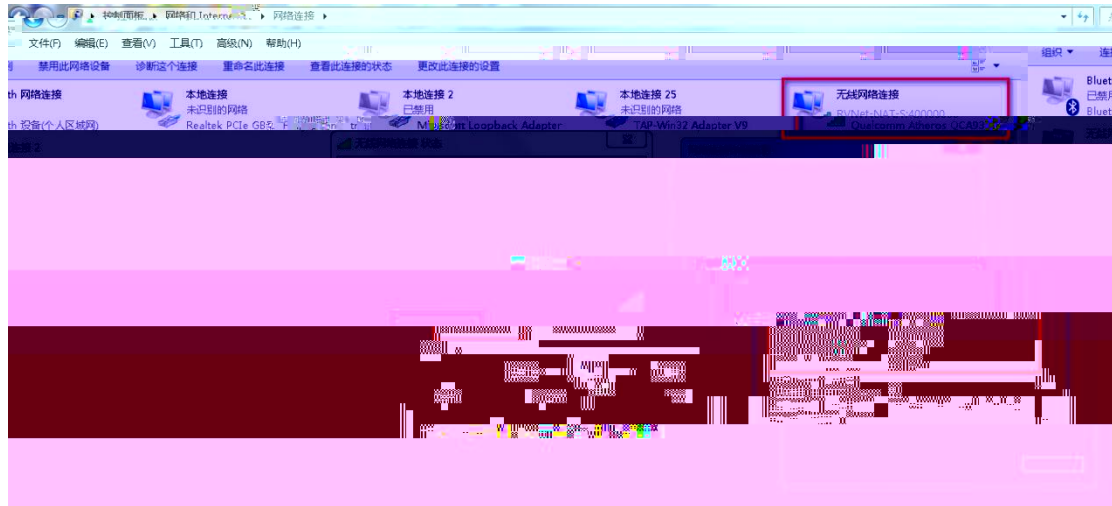


3. IP PING

ping 192.168.3.1

:XXXX%

RVNet-NAT-S NAT

RVNet-NAT

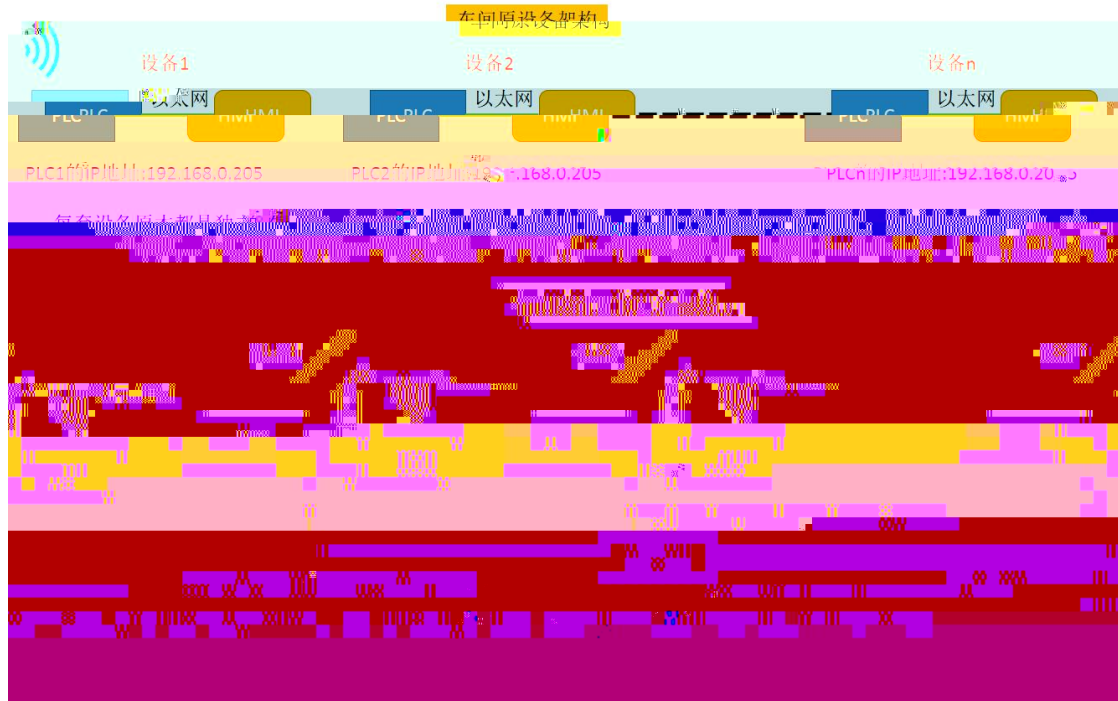



RVNet-NAT-S

RVNet-NAT-S

	Pwr	LAN1	LAN2	WiFi
WiFi		802.11 b/g/n 2.4G-2.5G		
	+26dBm(MAX,2.4G 802.11b/g/n)			
	-89dBm(802.11b)	-74dBm(802.11g)	-72dBm(802.11n)	
	Station/AP			
	WPA-PSK/WPA2-PSK/WEP			
	TCP/IP UDP/IP			

32

	0-60
	95%
	2014/30/EU
	CE
(L*W*H)	115*27*75mm
	150g

2766

250101

0531-88689022

0531-88689022

88

266107

0532-68894021 83029299

0532-83029299

18753243991 garywei@dingtalk.com

www.qiyuanauto.cn

